


joe@www-thegum... × joe@ns1-thegummi... × joe@db-thegummi... × joe@yavin: ~/Pictures × joe@www-thegummibear:~\$ echo "I am going to install wordpress. You could choose any web app that interests you"

I am going to install wordpress. You could choose any web app that interests you joe@www-thegummibear:~\$

## 🔞 🖃 💷 🛮 joe@ns1-thegummibear: ~ joe@www-thegum... × joe@ns1-thegummi... × joe@db-thegummi... × joe@yavin: ~/Pictures × IN MX 10 mail nginx2 IN Α 144.38.199.173 10 mail IN MX : Some CNAME addresses squishy IN CNAME WWW nginx ΙN CNAME examplefs iateat IN CNAME WWW ; I added bouncy for my php script demo bouncy IN CNAME WWW ; here is my addition for my wordpress app WP IN CNAME WWW IN Α 144.38.199.170 gooey sticky 144.38.199.171 ΙN Α brown IN 144.38.217.10 Α chunky IN Α 144.38.217.10 IN Α 144.38.217.11 saucy IN 144.38.217.12 COLUÂ Α IN 144.38.194.8 nas Α IN 144.38.199.172 trump Α hillary IN Α 144.38.199.172

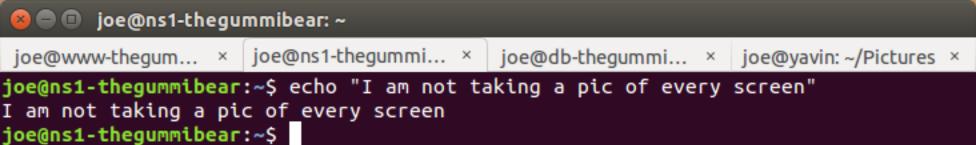

```
joe@ns1-thegummibear: ~
joe@www-thegum... × joe@ns1-thegummi... × joe@db-thegummi... × joe@yavin: ~/Pictures ×
joe@ns1-thegummibear: ~$ ping wp
PING www.thegummibear.com (144.38.199.165) 56(84) bytes of data.
```

```
PING www.thegummibear.com (144.38.199.165) 56(84) bytes of data.
64 bytes from www.thegummibear.com (144.38.199.165): icmp_seq=1 ttl=64 time=0.65
5 ms
64 bytes from www.thegummibear.com (144.38.199.165): icmp_seq=2 ttl=64 time=0.55
7 ms
```

--- www.thegummibear.com ping statistics --2 packets transmitted, 2 received, 0% packet loss, time 2159ms
rtt min/avg/max/mdev = 0.557/0.606/0.655/0.049 ms
joe@ns1-thegummibear:~\$ echo "A ping test does a nameserver lookup"

A ping test does a nameserver lookup joe@ns1-thegummibear:~\$

^C



joe@www-thegum... × joe@ns1-thegummi... × joe@db-thegummi... × joe@yavin: ~/Pictures ×


joe@www-thegummibear:~\$ sudo vi /etc/apache2/sites-available/wp.thegummibear.com

```
joe@www-thegum... × joe@ns1-thegummi... × joe@db-thegummi... × joe@yavin: ~/Pictures ×
<VirtualHost 144.38.199.165:80>
ServerName wp.thegummibear.com
DocumentRoot /var/www/html/wp
</VirtualHost>
```

All


</sites-available/wp.thegummibear.com" [New] 5L, 111C written 3,30


🔞 🖃 🗊 joe@www-thegummibear: ~




Enabling site wp.thegummibear.com.
To activate the new configuration, you need to run:
service apache2 reload

joe@www-thegummibear:/etc/apache2/sites-available\$ sudo service apache2 reload
joe@www-thegummibear:/etc/apache2/sites-available\$

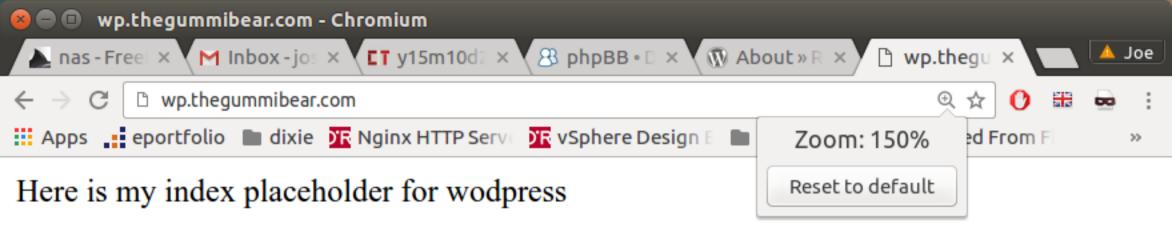

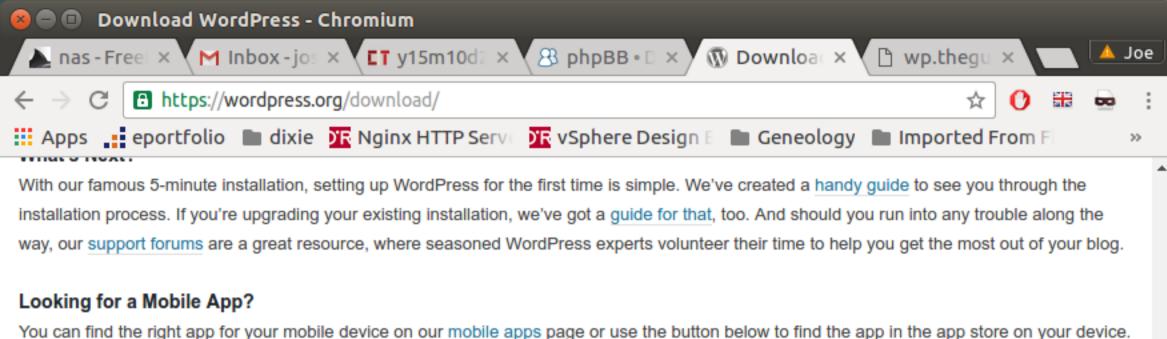

Get a Mobile App

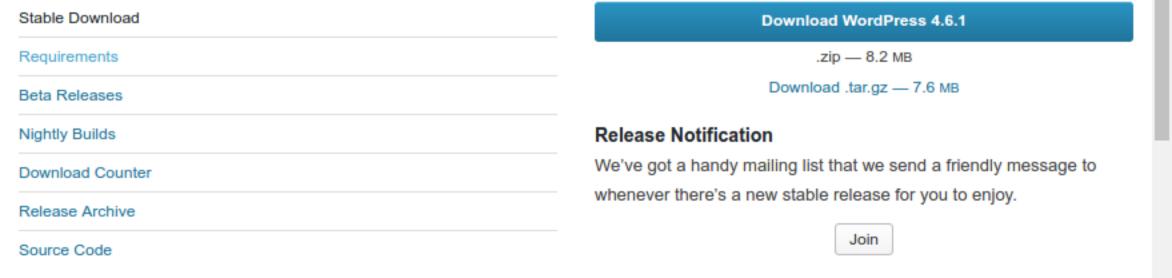


joe@www-thegummibear: /var/www/html/wp
joe@www-thegum... × joe@ns1-thegummi... × joe@db-thegummi... × joe@yavin: ~/Pictures ×
joe@www-thegummibear:/var/www/html/wp\$ sudo wget https://wordpress.org/latest.tar.gz

```
😰 🖃 🔳 joe@www-thegummibear: /var/www/html/wp
joe@www-thegum... × joe@ns1-thegummi... × joe@db-thegummi... × joe@yavin: ~/Pictures ×
wordpress/wp-includes/class-wp-customize-panel.php
wordpress/wp-includes/pluggable-deprecated.php
wordpress/wp-includes/widgets.php
wordpress/wp-includes/functions.wp-scripts.php
wordpress/wp-includes/class-wp-image-editor-gd.php
wordpress/wp-includes/canonical.php
wordpress/wp-includes/ms-load.php
wordpress/wp-includes/class-walker-category-dropdown.php
wordpress/wp-includes/Text/
wordpress/wp-includes/Text/Diff/
wordpress/wp-includes/Text/Diff/Engine/
wordpress/wp-includes/Text/Diff/Engine/string.php
wordpress/wp-includes/Text/Diff/Engine/native.php
wordpress/wp-includes/Text/Diff/Engine/xdiff.php
wordpress/wp-includes/Text/Diff/Engine/shell.php
wordpress/wp-includes/Text/Diff/Renderer/
wordpress/wp-includes/Text/Diff/Renderer/inline.php
wordpress/wp-includes/Text/Diff/Renderer.php
wordpress/wp-includes/Text/Diff.php
wordpress/wp-includes/rest-api.php
wordpress/wp-includes/update.php
wordpress/wp-includes/comment.php
wordpress/wp-config-sample.php
joe@www-thegummibear:/var/www/html/wp$
```

```
| joe@www-thegum... × joe@ns1-thegummi... × joe@db-thegummi... × joe@yavin: ~/Pictures × joe@www-thegummibear:/var/www/html/wp$ ls index.html latest.tar.gz wordpress joe@www-thegummibear:/var/www/html/wp$ echo "Visit the site/directory in a browser"

Visit the site/directory in a browser joe@www-thegummibear:/var/www/html/wp$
```

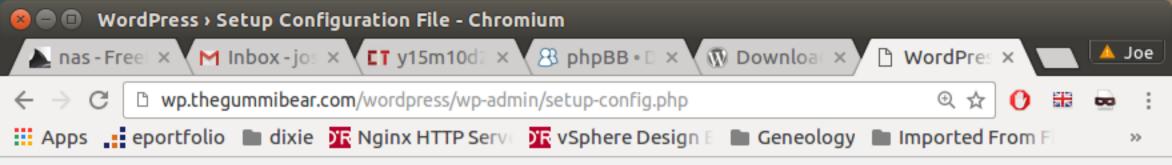




Welcome to WordPress. Before getting started, we need some information on the database. You will need to know the following items before proceeding.

- 1. Database name
- 2. Database username
- Database password
- 4. Database host
- 5. Table prefix (if you want to run more than one WordPress in a single database)

We're going to use this information to create a wp-config.php file. If for any reason this automatic file creation doesn't work, don't worry. All this does is fill in the database information to a configuration file. You may also simply open wp-config-sample.php in a text editor, fill in your information, and save it as wp-config.php. Need more help? We got it.

In all likelihood, these items were supplied to you by your Web Host. If you don't have this information, then

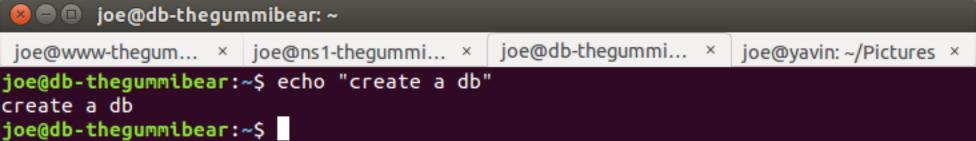

```
🔞 🖨 📵 joe@db-thegummibear: ~
```

joe@www-thegum... × joe@ns1-thegummi... × joe@db-thegummi... × joe@yavin: ~/Pictures ×

## joe@db-thegummibear:~\$ mysql -u root -p

Enter password:

Welcome to the MySQL monitor. Commands end with ; or \g.

Your MySQL connection id is 12 Server version: 5.7.15-0ubuntu0.16.04.1 (Ubuntu)

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> grant all privileges on wordpress.\* to 'cowboy'@'144.38.199.165' identifi

Copyright (c) 2000, 2016, Oracle and/or its affiliates. All rights reserved.


mysql> create database wordpress;

Query OK, 1 row affected (0.00 sec)

ed by 'yeehaw'; Query OK, 0 rows affected, 1 warning (0.00 sec)

mysql>

owners.

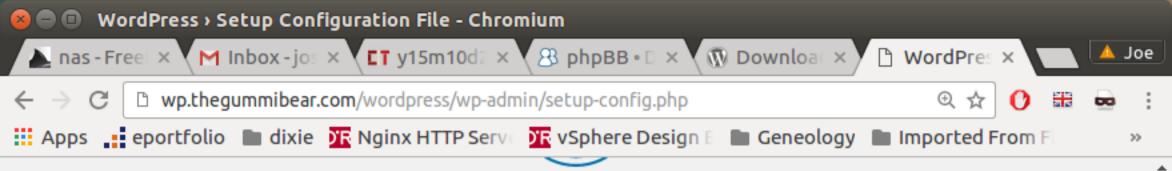


Welcome to WordPress. Before getting started, we need some information on the database. You will need to know the following items before proceeding.

- 1. Database name
- Database username
- 3. Database password
- 4. Database host
- 5. Table prefix (if you want to run more than one WordPress in a single database)

We're going to use this information to create a wp-config.php file. If for any reason this automatic file creation doesn't work, don't worry. All this does is fill in the database information to a configuration file. You may also simply open wp-config-sample.php in a text editor, fill in your information, and save it as wp-config.php. Need more help? We got it.

In all likelihood, these items were supplied to you by your Web Host. If you don't have this information, then you will need to contact them before you can continue. If you're all ready...

Let's go!

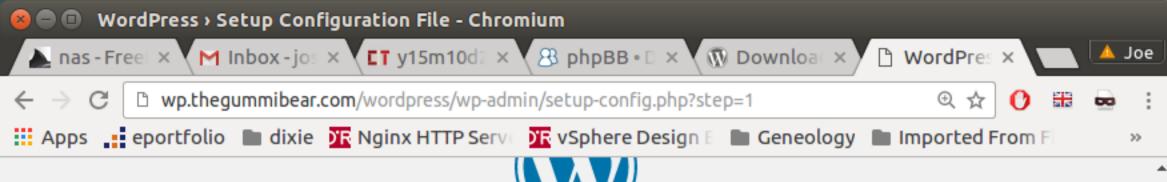




Below you should enter your database connection details. If you're not sure about these, contact your host.

Database Name	wordpress	The name of the database you want to use with WordPress.
Username	cowboy	Your database username.
Password	yeehaw	Your database password.
Database Host	144.38.199.167	You should be able to get this info from your web host, if localhost doesn't work.
Table Prefix	wp_	If you want to run multiple WordPress installations in a single database, change this.

Submit

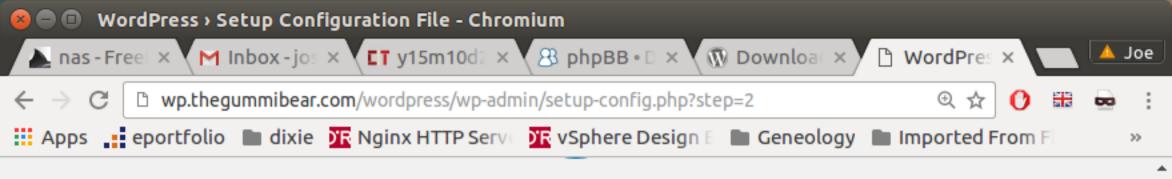



Sorry, but I can't write the wp-config.php file.

You can create the wp-config.php manually and paste the following text into it.

After you've done that, click "Run the install."


Run the install



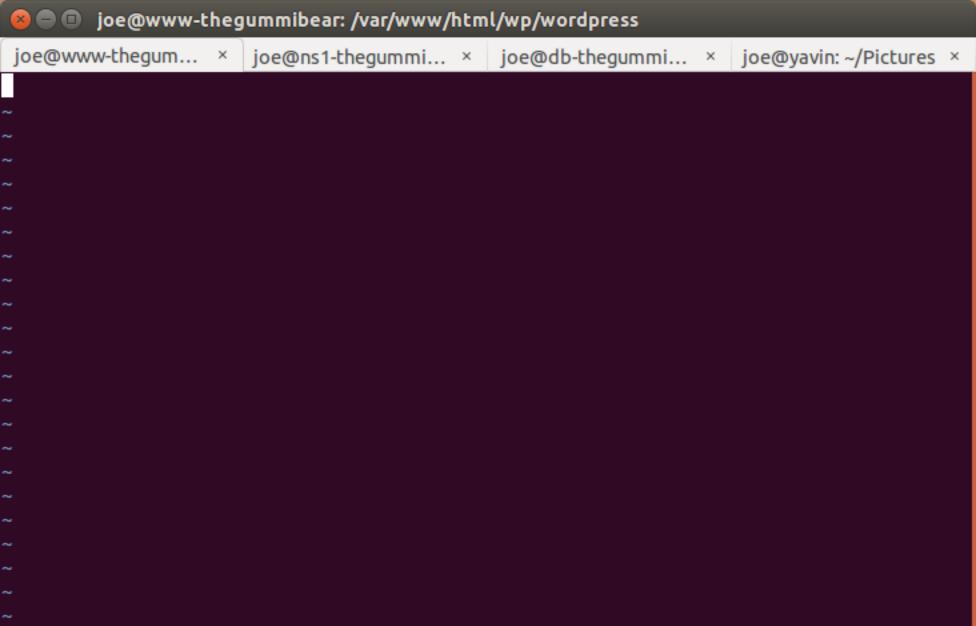

```
joe@www-thegum... × joe@ns1-thegummi... × joe@db-thegummi... × joe@yavin: ~/Pictures ×
/**
* For developers: WordPress debugging mode.
* Change this to true to enable the display of notices during development.
* It is strongly recommended that plugin and theme developers use WP_DEBUG
* in their development environments.
* For information on other constants that can be used for debugging,
* visit the Codex.
* @link https://codex.wordpress.org/Debugging in WordPress
define('WP_DEBUG', false);
/* That's all, stop editing! Happy blogging. */
/** Absolute path to the WordPress directory. */
if ( !defined('ABSPATH') )
        define('ABSPATH', dirname(__FILE__) . '/');
/** Sets up WordPress vars and included files. */
require once(ABSPATH . 'wp-settings.php');
-- INSERT --
                                                               90,1
                                                                             Bot
```

🔞 🖃 🔳 joe@www-thegummibear: /var/www/html/wp/wordpress

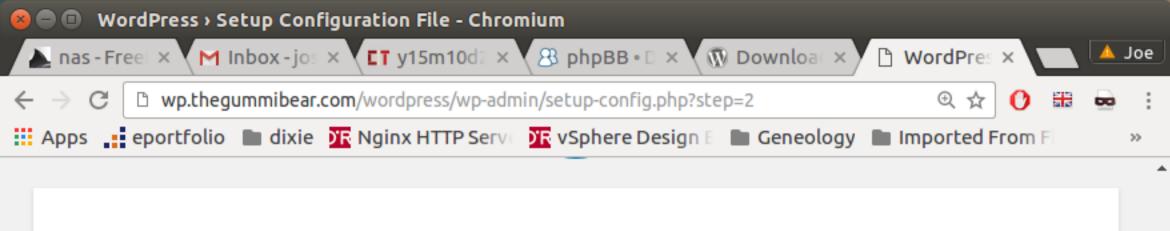

Sorry, but I can't write the wp-config.php file.

You can create the wp-config.php manually and paste the following text into it.


```
<?php
/**
 * The base configuration for WordPress


*
 * The wp-config.php creation script uses this file during the
 * installation. You don't have to use the web site, you can
 * copy this file to "wp-config.php" and fill in the values.

*
 * This file contains the following configurations:
 *
 * MySQL settings
 * * Secret keys
 * Database table prefix
 * ABSPATH
 *</pre>
```

After you've done that, click "Run the install."

Run the install

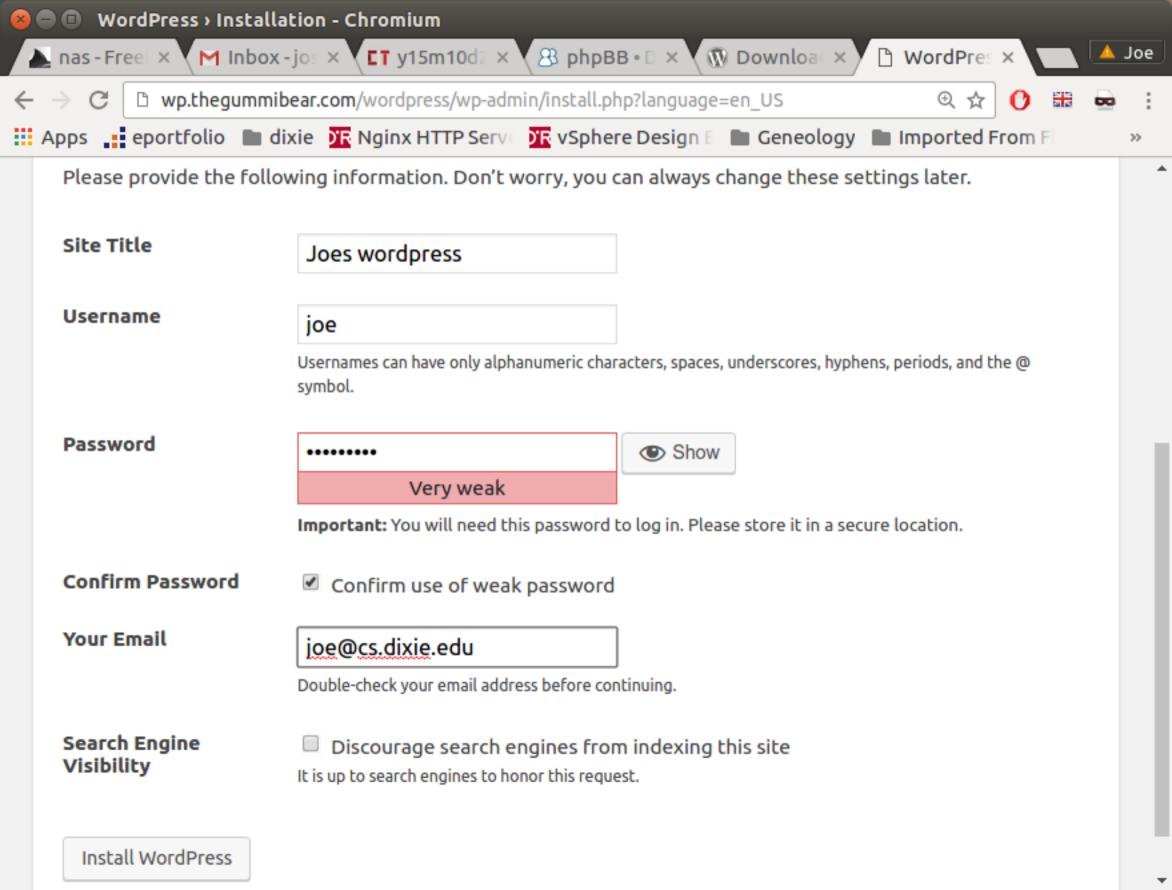

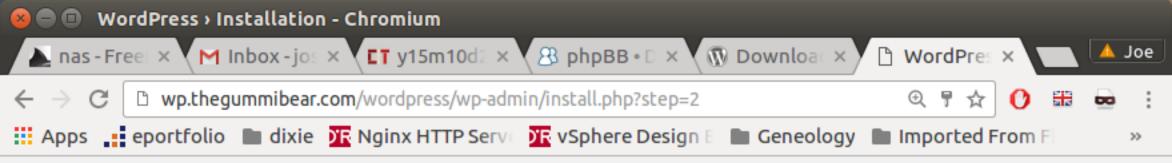




## Success!

WordPress has been installed. Thank you, and enjoy!

**Username** joe

Password Your chosen password.


Log In

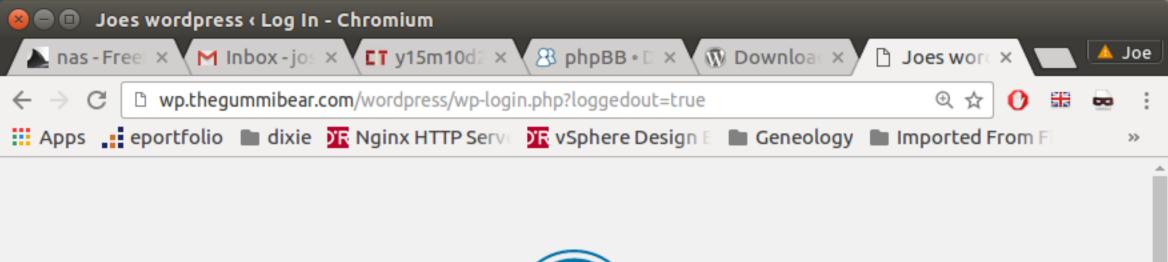



You are now logged out.

Username or Email	
Password	
Remember Me	Log In

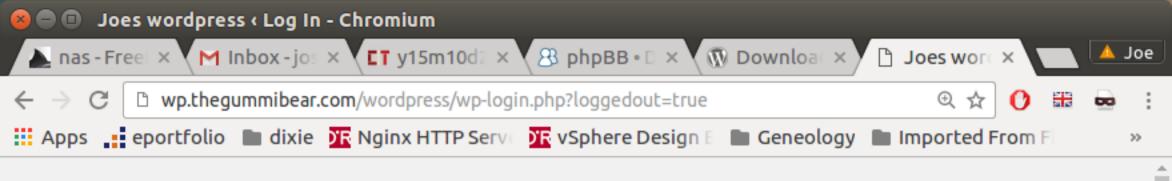



You are now logged out.

joe	
Password	
•••••	
Remember Me	Log In

